

RANGE
1170kW to
5000kW



EUROMAX

**Oil, bio-liquid or gas
3 pass hot water boiler**

**MAXIMUM OPERATING
TEMPERATURE: 150°C**

**OPERATING PRESSURE RANGE:
3BARS to 8BARS**


Three pass design gives
balanced heat transfer

Stable performance at
low heat loads

Boiler design aids low
pollution level

Standing losses minimised by
120mm thick glass silk insulation

Integrated injector plates for
return water circuit

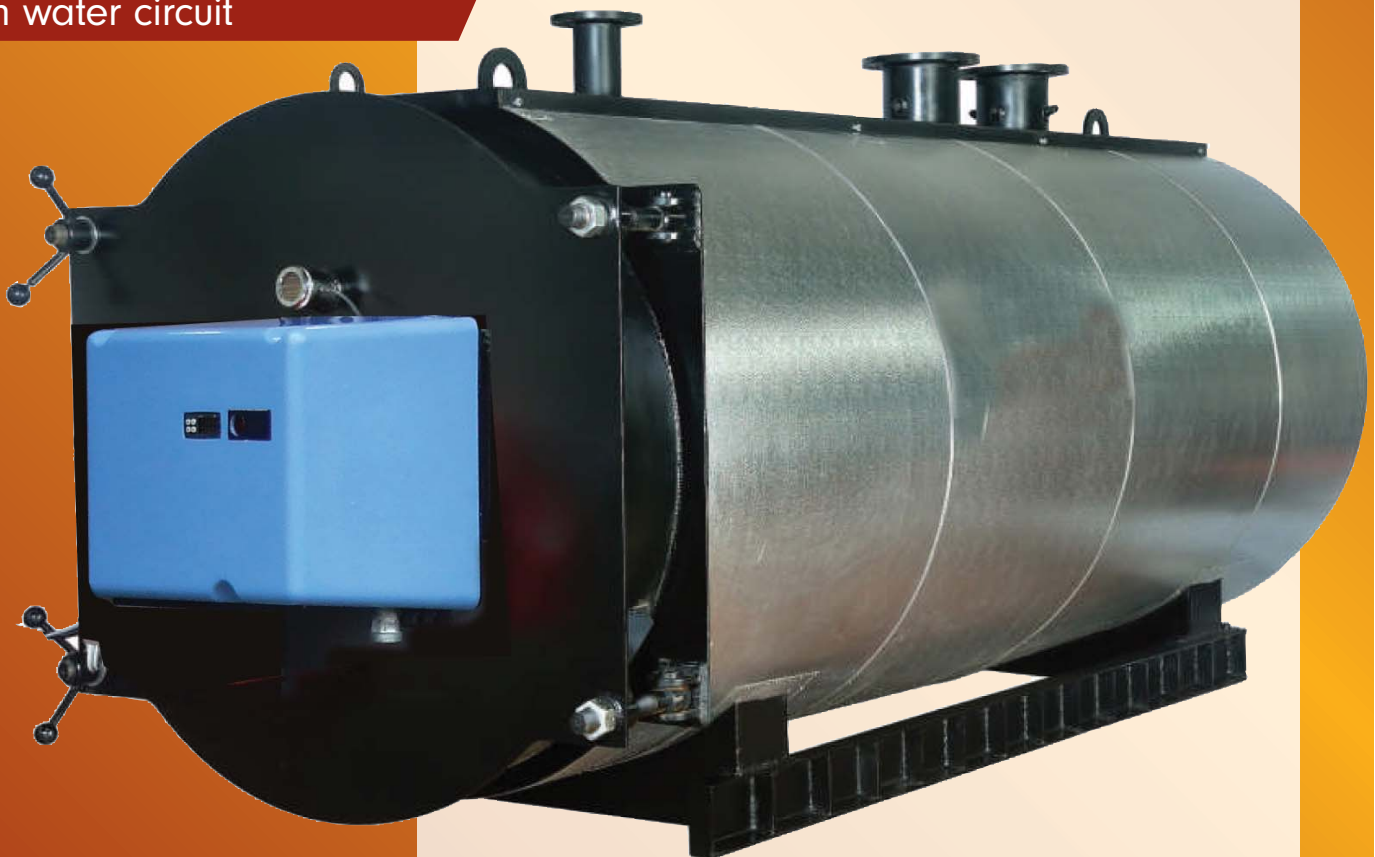


LLOYDS
CERTIFICATE



EUROMAX-C OIL, BIO-LIQUID OR GAS

3 pass hot water boiler with inbuilt dry economiser

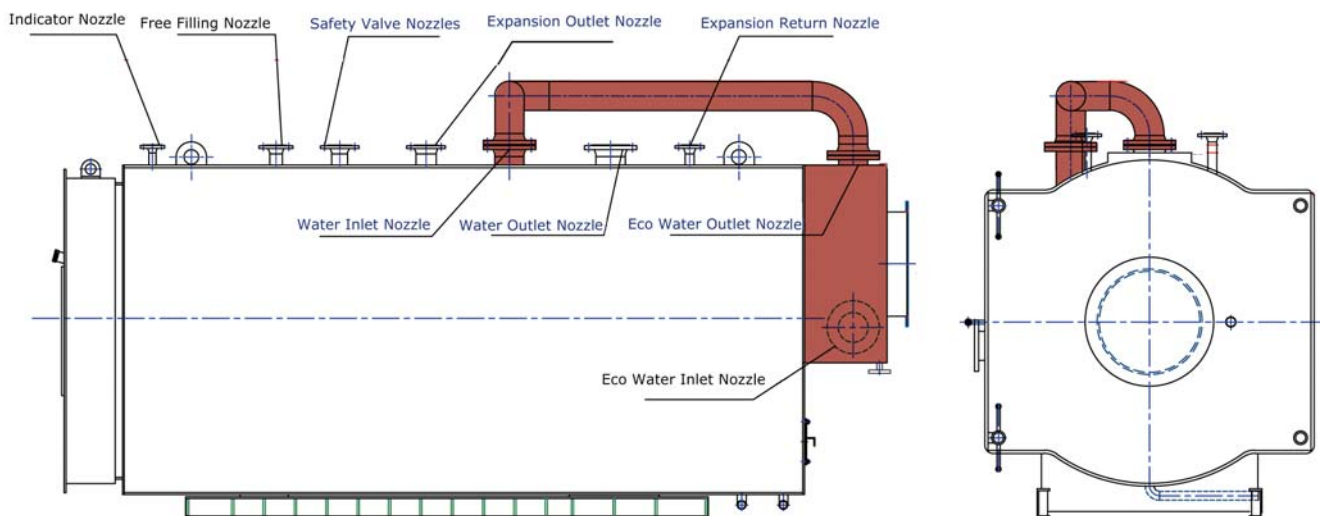

EUROMAX-C leading dimensions, plus connections and performance of the inbuilt economisers

EUROMAX OUTPUT KW	1170	1455	1745	2330	2910	3500	4000	5000
C output at 60°C return	46	59	74	105	138	175	212	289
Length mm	3675	4010	4175	4375	4650	5030	5322	5550
Width mm	1520	1520	1625	1800	1860	2000	1985	2130
Height mm	1750	1750	1845	1885	2055	2145	2210	2385
C connections DN	125	125	150	150	200	200	250	250
C water content litres	1791	2178	2270	2600	2848	3998	4663	6678
C min water flow l/sec	13.9	17.5	20.1	27.8	34.7	41.7	47.8	59.7
Total flue gas drop mBAR	6.8	7.8	8.6	10.5	11	11.2	11.2	11.5
Flue gas outlet temp for 60°C water return	76	76	76	77	78	79	78	78
Gas %GCV efficiency	87.5	87.5	87.5	87.3	87.1	87.0	87.1	87.1
Oil %GCV efficiency	87.9	87.9	87.7	87.5	87.5	87.4	87.5	87.5